


**HOEFLON**

**C6**

POWERFUL  
ALL-ROUNDER



**Lifting The Standards**

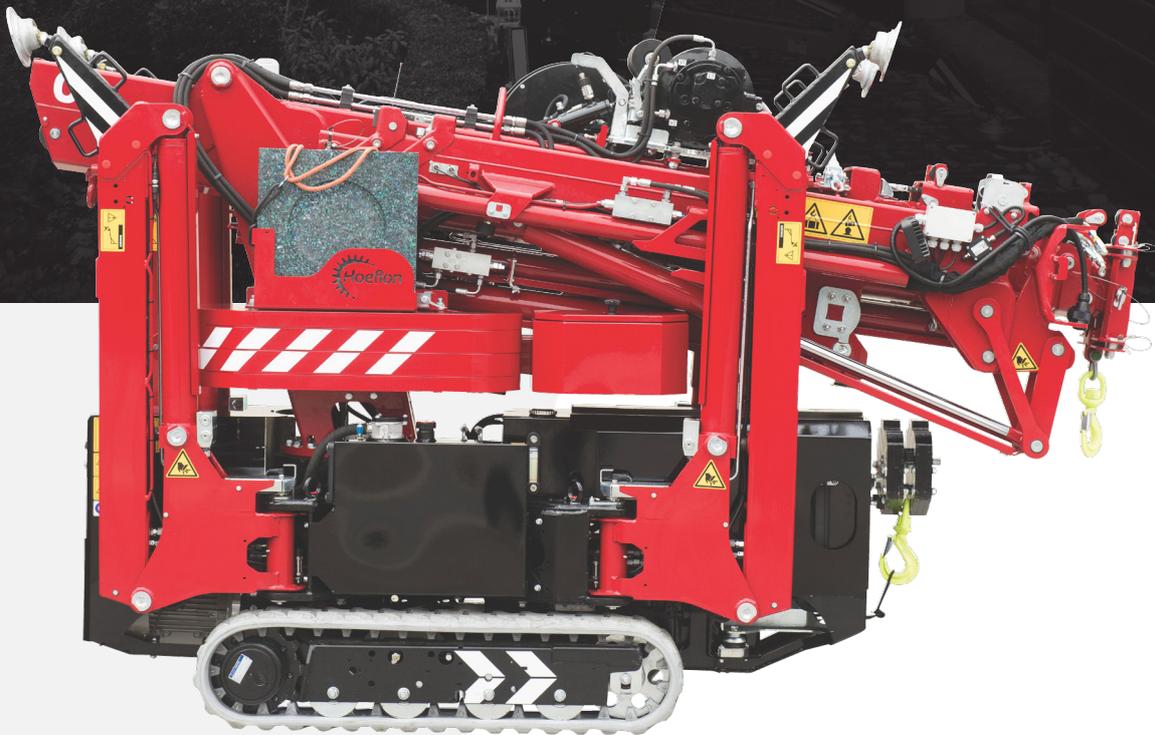


**HOEFLON<sup>®</sup>**





# HOEFLON C6

Multifunctional, robust and very simple operation – that's the C6 compact crane in a nutshell. It's a best seller in the mini-crane category. This crane is ideal for placing glass and accurately positioning steel beams.

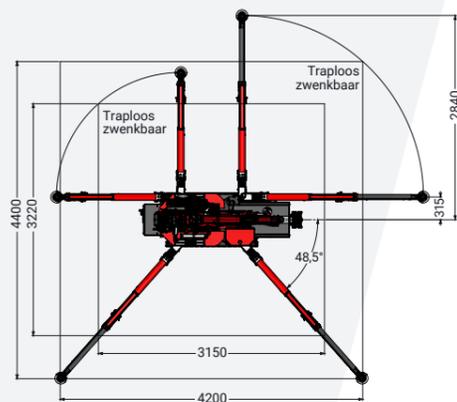

Standard

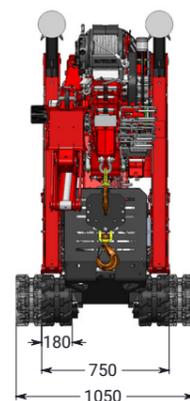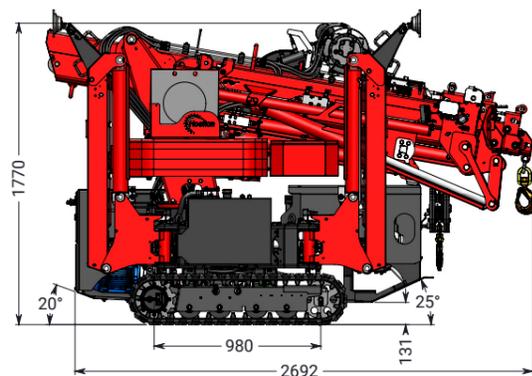

## Standard configuration

Capacity	3,000 kg
Boom outreach	9.25 m, and 13.7 m with options
Hoisting height max. without jib	11.5 m, and 17 m with options
Transport dimensions LxWxH	2.9 m x 0.75 m x 1.82 m
Total weight	2,650 kg, and 2,850 kg with options
Boom angle	-5° to 83°
Boom system	cylinder and chain system
Slewing angle	360°
Driving speed	1st gear: 1.1 km/h 2nd gear: 2.2 km/h
Engine	Yanmar 3-cylinder diesel
Inclination angle, driving	20°
Outrigger pressure	2,800 kg per outrigger
Ground pressure, tracks	0.79 kg/cm <sup>2</sup>
Extendible, removable ballast	600 kg
Noise	75 dB

## Accessories/Options


Dimensions including winch and jib	3.14 m x 0.75 m x 1.95 m
Fly jib <b>1</b>	4.3 m
Winch <b>2</b>	1,000 kg, 2,000 kg and 3,000 kg
Hoisting speed with winch	20.8 m/min
Winch cable	40 m long
Extension section <b>3</b>	30° adjustable
Electric motor	230 V single phase
Outriggers	position measuring system for steplessly swivelling outriggers
Outriggers <b>4</b>	bend
Outriggers	hydraulically extending stepless
Slewing	unlimited
Crawler <b>5</b>	non-marking
Crawler	pick and carry
Lighting	work light on boom and jib
Storage box <b>6</b>	extra storage box
Speed controller	900 to 1,700 rpm




Endless positioning  
with the Hoeflon C6

# You're standing strong

Each leg of the C6 can be positioned separately from the other legs. The C6 has hydraulically adjustable legs, hydraulically extendable legs and folding legs. This allows you to set the outriggers at any angle and extend them to fit the space you have. You can also easily overcome uneven terrain or obstacles.

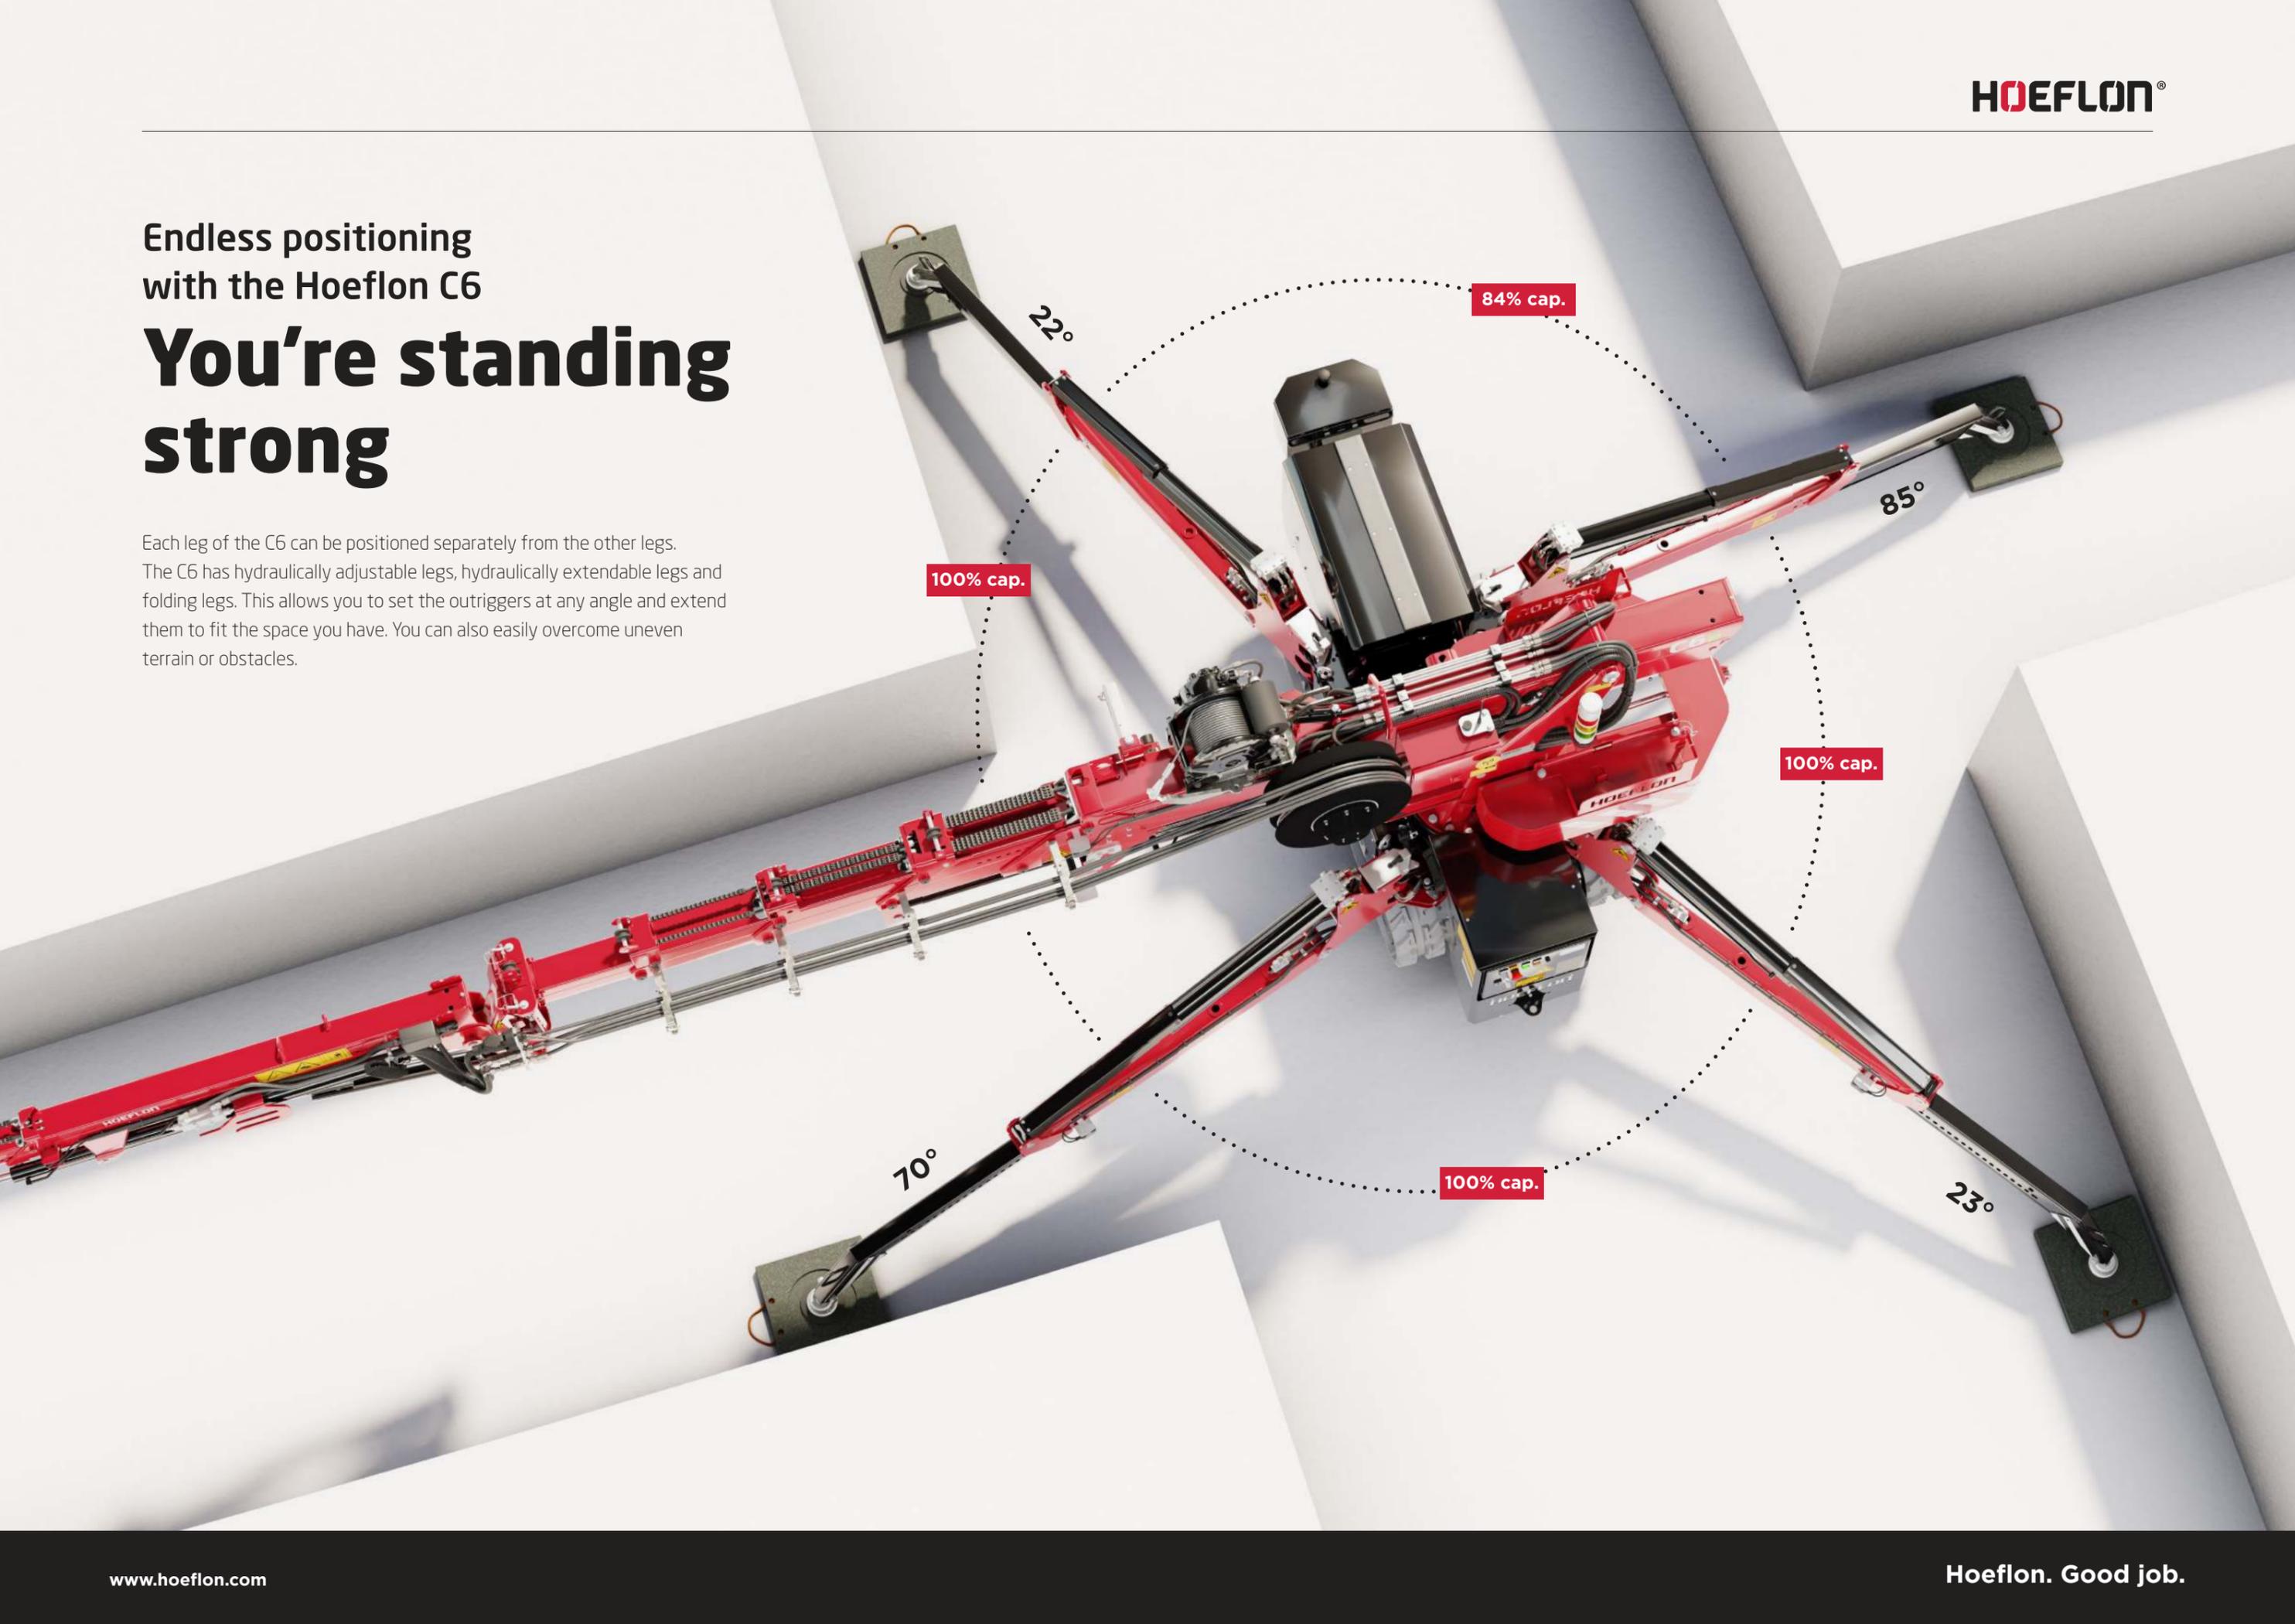

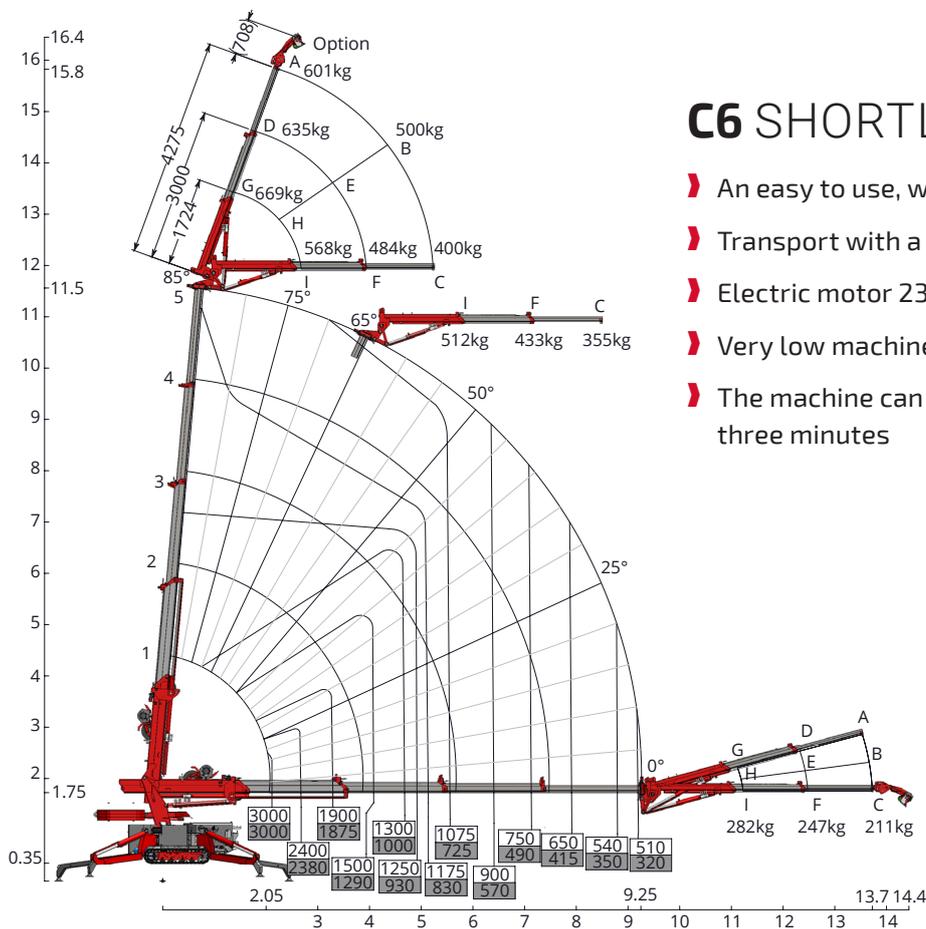

## C6 SHORTLY

- › An easy to use, wirelessly remote controlled machine
- › Transport with a trailer, 3.500 kg
- › Electric motor 230 V
- › Very low machine weight with high hoisting capacity
- › The machine can be operational at 16 metres within three minutes

With fly-jib


No rights can be derived from the information stated here.



## WHY HOEFLON?

Hoeflon transport solutions are extremely versatile, making them perfect for moving heavy materials in close quarters or difficult-to-reach areas at project sites. We are happy to offer advice concerning the best solution for your situation. Ask us about the possibilities!

Your Hoeflon® dealer ▶

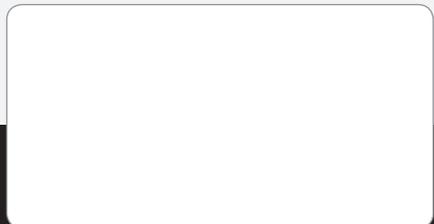

**HOEFLON®**


Made in Holland

Hoeflon International B.V.

address Zwolleweg 2 3771 NR Barneveld, The Netherlands

tel. +31 (0)342 400288 email info@hoeflon.com



**HOEFLON.COM**

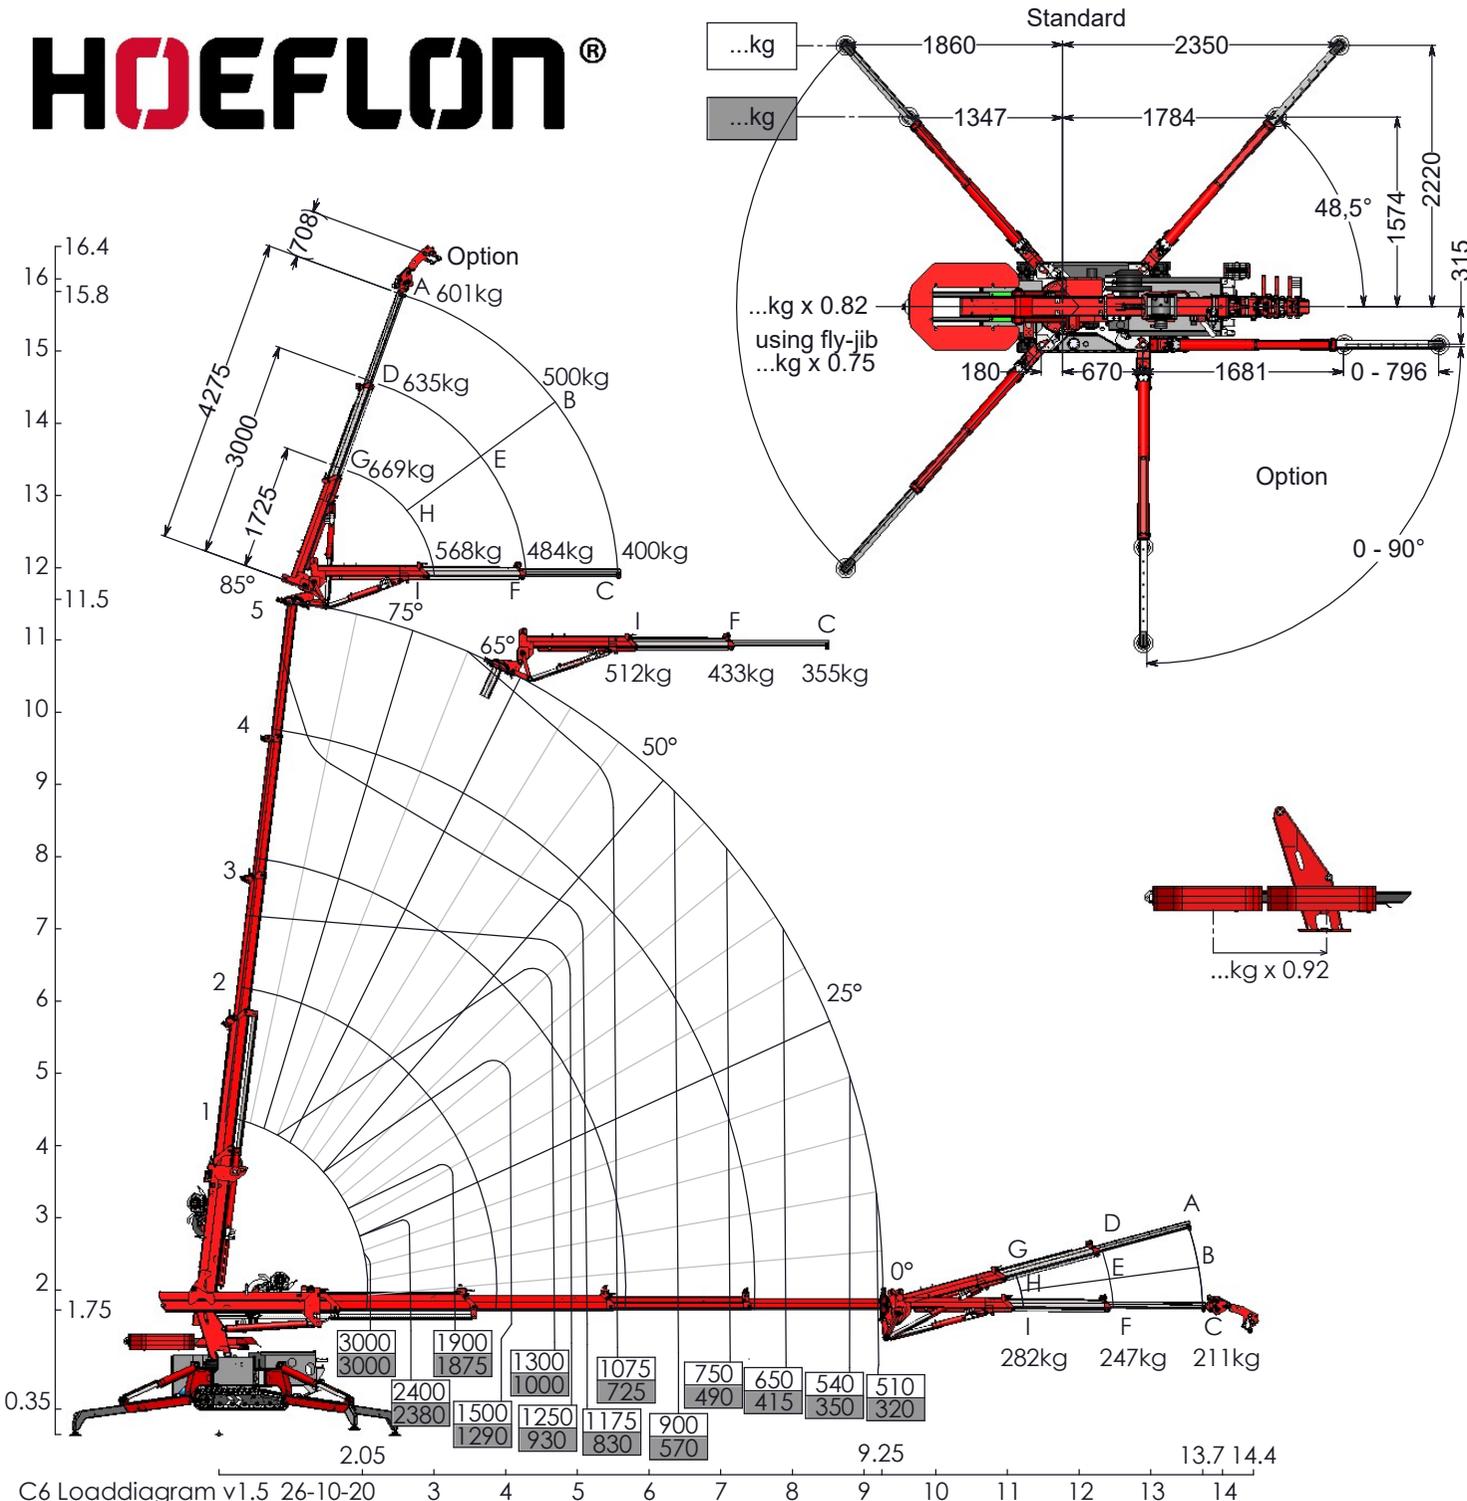

		Load Flyjib [kg]								
Angle main boom	nr.									
		A	B	C	D	E	F	G	H	I
85	5	601	500	400	635	559	484	669	618	568
		454	378	303	480	423	366	506	467	429
	4	696	565	433	721	636	552	745	708	671
		513	416	319	531	469	407	549	522	495
	3	761	611	461	781	691	601	800	770	741
		593	476	359	608	538	468	623	600	577
	2	805	646	487	814	728	642	823	809	796
		785	630	475	793	709	625	802	789	776
	1	813	663	514	820	740	659	827	816	805
		813	663	514	820	740	659	827	816	805
75	5	567	471	375	602	528	455	638	586	534
		428	356	284	455	399	344	482	443	404
	4	691	551	411	715	627	539	739	703	667
		509	406	303	527	462	397	544	518	492
	3	764	604	444	784	689	594	803	774	744
		595	470	345	610	536	462	625	602	579
	2	805	641	476	814	725	636	823	809	796
		785	624	464	794	707	620	802	789	776
	1	816	663	510	824	741	659	832	820	808
		816	663	510	824	741	659	832	820	808
65	5	518	436	355	555	494	433	591	552	512
		391	327	264	419	372	325	447	417	387
	4	678	536	393	707	620	533	736	704	672
		500	395	290	521	457	393	543	519	495
	3	766	597	429	788	692	595	811	786	761
		596	465	334	614	538	463	631	612	593
	2	807	636	466	818	726	635	829	817	804
		786	620	454	797	708	619	808	796	784
	1	822	664	505	834	748	663	846	833	820
		822	664	505	834	748	663	846	833	820
50	5	454	393	332	499	458	416	544	523	501
		216	192	168	253	230	207	289	268	247
	4	534	453	372	635	584	532	736	714	692
		289	253	217	349	313	278	409	374	339
	3	603	507	411	712	657	603	820	808	796
		430	369	308	534	475	416	638	582	525
	2	682	568	453	770	707	644	858	846	834
		665	553	442	750	689	627	836	824	813
	1	760	630	500	822	753	683	885	875	866
		760	630	500	822	753	683	885	875	866
25	5	249	242	236	291	284	278	332	326	320
		108	104	101	126	123	120	145	142	139
	4	342	331	321	411	401	390	481	470	460
		155	150	145	186	181	176	217	212	207
	3	430	413	395	576	561	545	722	708	694
		240	231	222	300	291	282	360	350	341
	2	483	462	441	668	649	630	853	836	818
		450	431	411	599	581	562	748	731	713
	1	546	520	494	723	709	696	900	899	898
		546	520	494	723	709	696	900	899	898
0	5	211	211	211	247	247	247	282	282	282
		87	87	87	102	102	102	118	118	118
	4	294	294	294	354	354	354	413	413	413
		130	130	130	156	156	156	183	183	183
	3	391	391	391	513	513	513	634	634	634
		206	206	206	258	258	258	310	310	310
	2	438	438	438	622	622	622	806	806	806
		393	393	393	529	529	529	666	666	666
	1	493	493	493	693	693	693	894	894	894
		493	493	493	693	693	693	894	894	894

# HOEFLON®

## Loadchart C6 without counterweight

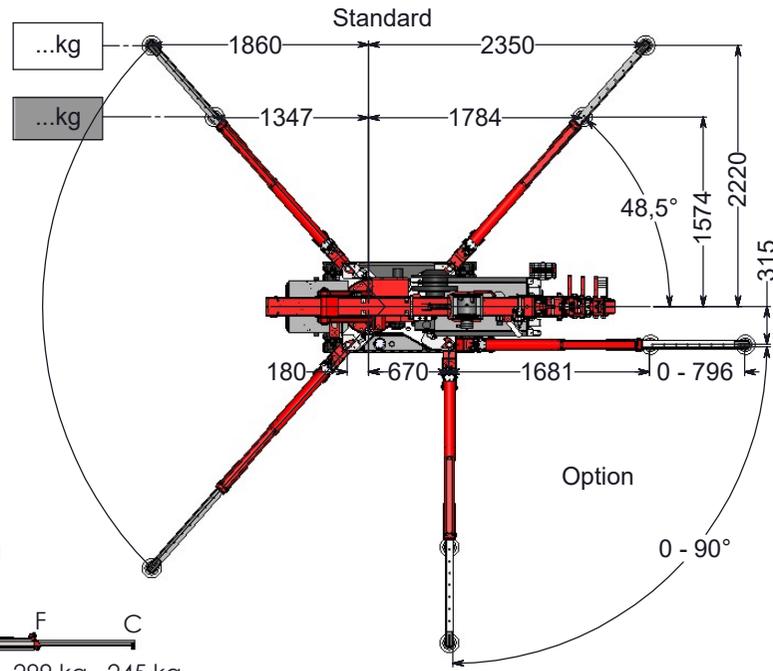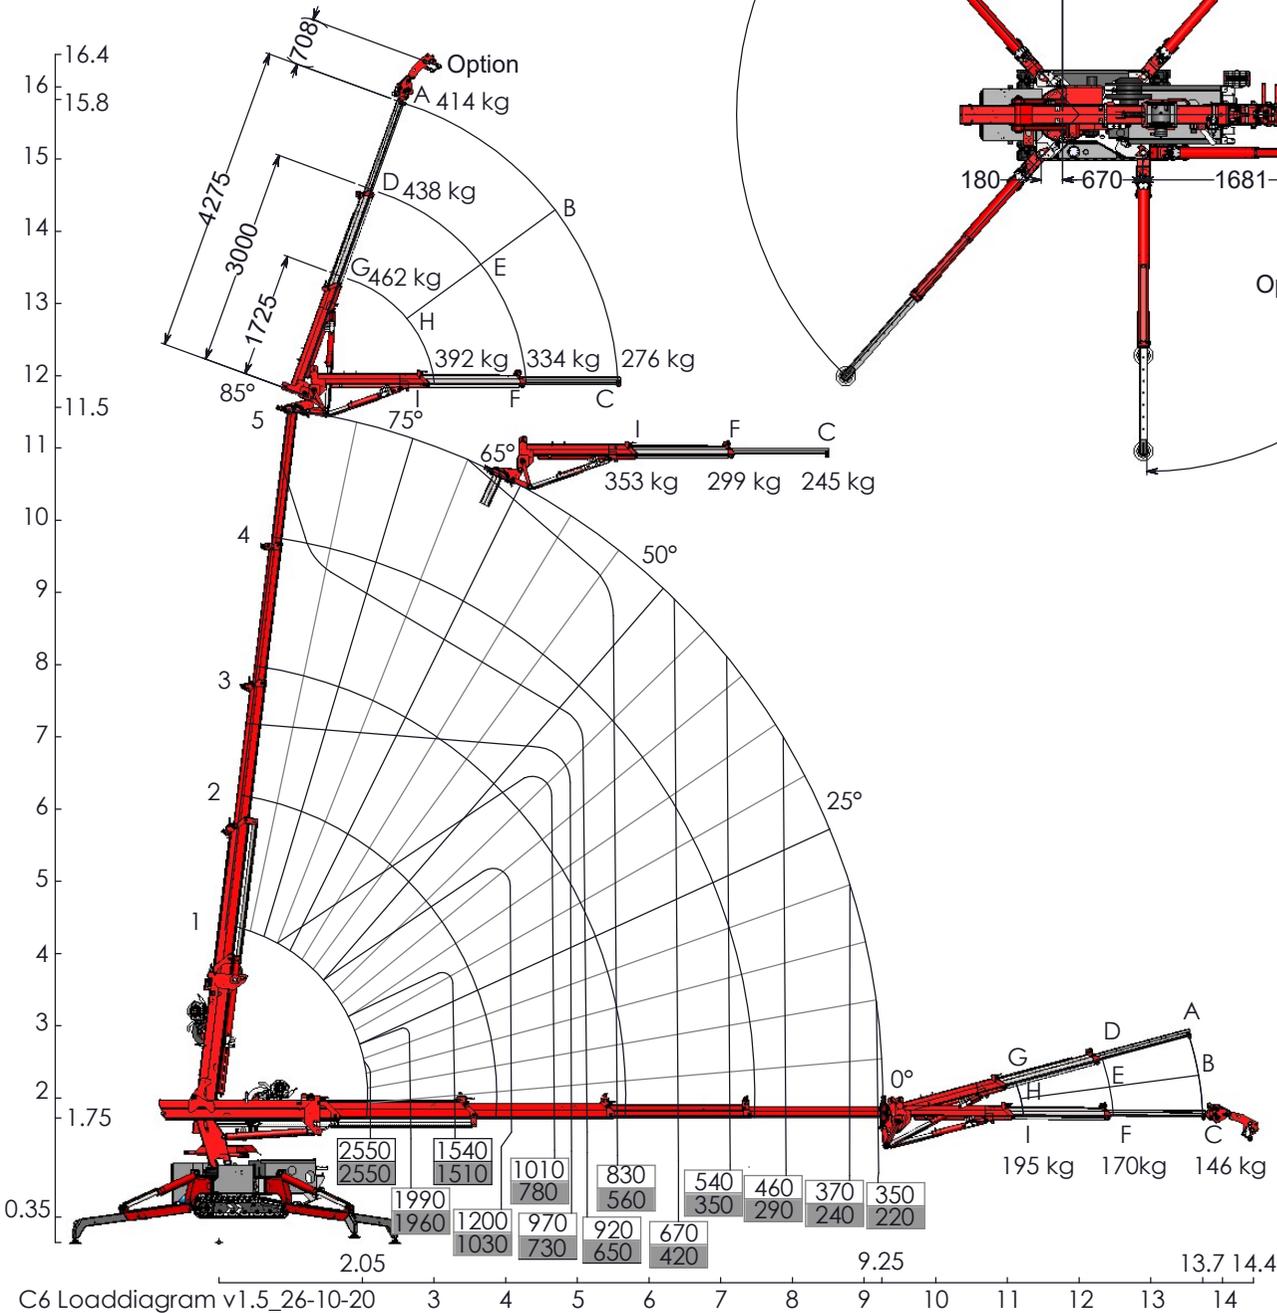

		Load Flyjib [kg]								
Angle main boom	nr.	A	B	C	D	E	F	G	H	I
		85	5	414	345	276	438	386	334	462
		313	261	209	331	292	253	349	323	296
	4	480	390	299	497	439	381	514	489	463
		354	287	220	366	324	281	379	360	341
	3	525	422	318	539	477	415	552	532	511
		409	328	248	419	371	323	430	414	398
	2	556	446	336	562	502	443	568	558	549
		542	435	328	547	489	431	553	544	535
	1	561	458	355	566	510	455	571	563	555
		561	458	355	566	510	455	571	563	555
75	5	391	325	259	416	365	314	440	404	368
		296	246	196	314	276	237	332	305	278
	4	477	380	284	493	433	372	510	485	460
		352	280	209	364	319	274	376	357	339
	3	527	417	306	541	475	410	554	534	514
		411	324	238	421	370	319	431	416	400
	2	556	442	328	562	500	439	568	559	549
		542	431	320	548	488	428	554	544	535
	1	563	457	352	569	512	455	574	566	558
		563	457	352	569	512	455	574	566	558
65	5	357	301	245	383	341	299	408	381	353
		270	226	182	289	257	224	308	288	267
	4	468	370	271	488	428	368	508	486	464
		345	272	200	360	315	271	374	358	342
	3	529	412	296	544	477	411	559	542	525
		411	321	230	423	372	320	435	422	409
	2	557	439	321	564	501	438	572	563	555
		542	428	313	550	488	427	557	549	541
	1	567	458	349	575	516	457	584	575	566
		567	458	349	575	516	457	584	575	566
50	5	313	271	229	344	316	287	376	361	346
		149	133	116	174	159	143	199	185	170
	4	368	313	257	438	403	367	508	493	478
		200	175	150	241	216	192	282	258	234
	3	416	350	284	491	454	416	566	558	549
		297	255	212	369	328	287	440	401	362
	2	471	392	313	531	488	444	592	584	576
		459	382	305	518	475	433	577	569	561
	1	524	435	345	567	519	471	611	604	597
		524	435	345	567	519	471	611	604	597
25	5	172	167	163	201	196	192	229	225	221
		74	72	70	87	85	83	100	98	96
	4	236	229	221	284	277	269	332	325	317
		107	103	100	128	125	121	149	146	143
	3	297	285	273	398	387	376	499	489	479
		166	160	154	207	201	194	248	242	235
	2	334	319	305	461	448	435	589	577	565
		311	297	284	414	401	388	516	504	492
	1	376	359	341	499	490	480	621	620	620
		376	359	341	499	490	480	621	620	620
0	5	146	146	146	170	170	170	195	195	195
		60	60	60	71	71	71	81	81	81
	4	203	203	203	244	244	244	285	285	285
		90	90	90	108	108	108	126	126	126
	3	270	270	270	354	354	354	437	437	437
		142	142	142	178	178	178	214	214	214
	2	302	302	302	429	429	429	556	556	556
		271	271	271	365	365	365	460	460	460
	1	340	340	340	478	478	478	617	617	617
		340	340	340	478	478	478	617	617	617